



SHANGHAI AVIC OPTOELECTRONICS

Q/S1010-2011

MODEL NO. : TM235VFS01-00ISSUED DATE: 2011/1/13VERSION : 1.0☒ Preliminary Specification☐ Final Product Specification

Customer : _____

Approved by	Notes

SHANGHAI AVIC Confirmed :

Prepared by	Checked by	Approved by

This technical specification is subjected to change without notice

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



TABLE OF CONTENTS

TABLE OF CONTENTS	2
RECORD OF REVISION	3
1. OUTLINE	4
1.1 STRUCTURE AND PRINCIPLE	4
1.2 APPLICATIONS	4
1.3 FEATURES	4
2. GENERAL SPECIFICATIONS	5
3. ABSOLUTE MAXIMUM RATINGS	6
4. BLOCK DIAGRAM	7
5. MECHANICAL SPECIFICATIONS	8
6. ELECTRICAL CHARACTERISTICS	8
6.1 DRIVING FOR LCD	8
6.2 DRIVING FOR BACKLIGHT	9
7. CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS	10
7.1 LVDS	10
7.2 BACKLIGHT	11
7.3 POSITION OF PLUGS AND A SOCKET	11
7.4 CONNECTION BETWEEN RECEIVER AND TRANSMITTER FOR LVDS	11
8. DISPLAY COLORS AND INPUT DATA SIGNALS	13
9. INTERFACE TIMING	14
9.1 TIMING CHARACTERISTICS	14
9.2 INPUT SIGNAL TIMING MAPPING	14
9.3 POWER ON/OFF SEQUENCE	15
9.4. POWER SUPPLY VOLTAGE SEQUENCE	16
9.5. FUSE	16
10. OPTICS	17
11. MARKINGS	20
11.1 PRODUCT LABEL	20
11.2 INDICATION LOCATIONS	21
12. PACKING, TRANSPORTATION AND DELIVERY	22
13. PRECAUTIONS	24
14. OUTDRAWING	27

**RECORD OF REVISION**

Rev	Issued Date	Description	Editor
1.0	2011-1-13	Preliminary Release	Stephen Sun

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

TM236VFS01-00 module is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight. The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. PC, signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays. The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

1.2 APPLICATIONS

- Monitor for PC

1.3 FEATURES

- a-Si TFT active matrix
- LVDS interface
- R.G.B input 8bit, 16.7 millions colors (6bit+Hi-FRC)
- Resolution WXGA+ (1,920× 1,080 pixels)
- Wide viewing angle 85°/85° (L/R); 80°/80° (U/D)
- High contrast ratio 1000 :1
- Module size 544.8 (H) ×320.5 (V) ×11.4 (D) mm
- Fast response time (Ton+ Toff= 5 ms)
- High gamut (68%)
- Edge light type backlight (White-LED)
- Inverter less
- RoHS compliance
- TCO'03 compliance



2. GENERAL SPECIFICATIONS

Display area	521.28 (H) × 293.22 (V) mm (typ.)
Diagonal size of display	60.0 cm (23.6 inches)
Drive system	a-Si TFT active matrix
Display color	16.7 M colors (6bit+ Hi-FRC)
Pixel	1,920 (H) × 1,080(V) pixels
Pixel arrangement	RGB vertical stripe
Dot pitch	0.2715 (H) × 0.2715(V) mm
Pixel pitch	0.0905 (H) × 0.2715 (V) mm
Module size	544.8 (H) × 320.5 (V) × 11.4 (D) mm
Weight	TBD
Contrast ratio	1000 :1 (typ.)
Viewing angle	170°/ 160° (typ.)
Color gamut	68 % (typ.)
Response time	5 ms (typ.)
Luminance	250 cd/m ² (typ.)
Transmissive Mode	Normally White
Surface Treatment	Anti Glare
Signal system	LVDS 2port
Power supply voltage	LCD panel signal processing board: 5.0V
Backlight	White-LED
Power consumption	TBD

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



3. ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Rating	Unit	Remarks
Power supply voltage	Power voltage	VDD	-0.3 ~ +6.0	V	Ta = 25°C
	Light bar voltage	V _{LED}	≤ 33	Vrms	Ta = 25°C
Input voltage for signals		V _i	-0.3 ~ +3.3	V	Ta = 25°C
Light bar peak forward current		I _F	≤ 150	mA _{rms}	Note 3
Storage temperature		T _{st}	-20 ~ +60	°C	Note 4
Operating temperature		T _{op}	0 ~ +50	°C	Note 4, 5
Absolute humidity		AH	≤ 70	g/m ³	Ta > 50°C
Operating altitude		-	≤ 4,850	m	0°C ≤ Ta ≤ 50°C
Storage altitude		-	≤ 13,600	m	-20°C ≤ Ta ≤ 60°C

Note1: Display signals are DA0+/-, DA1+/-, DA2+/-, DA3+/-, CKA+/-, DB0+/-, DB1+/-, DB2+/-, DB3+/-, and CKB+/-.

Note2: Function signal is MSL.

Note3: Pulse width ≤ 10msec, and duty ≤ 1/10.


Note4: Temperature and relative humidity range is shown in the figure below.

(a) 90%RH Max. (Ta ≤ 40°C)

(b) Web-bulb temperature should be 39°C Max. (Ta > 40°C)

(c) No condensation.


Note5: The temperature of panel display surface area should be 0°C Min and 60°C Max.

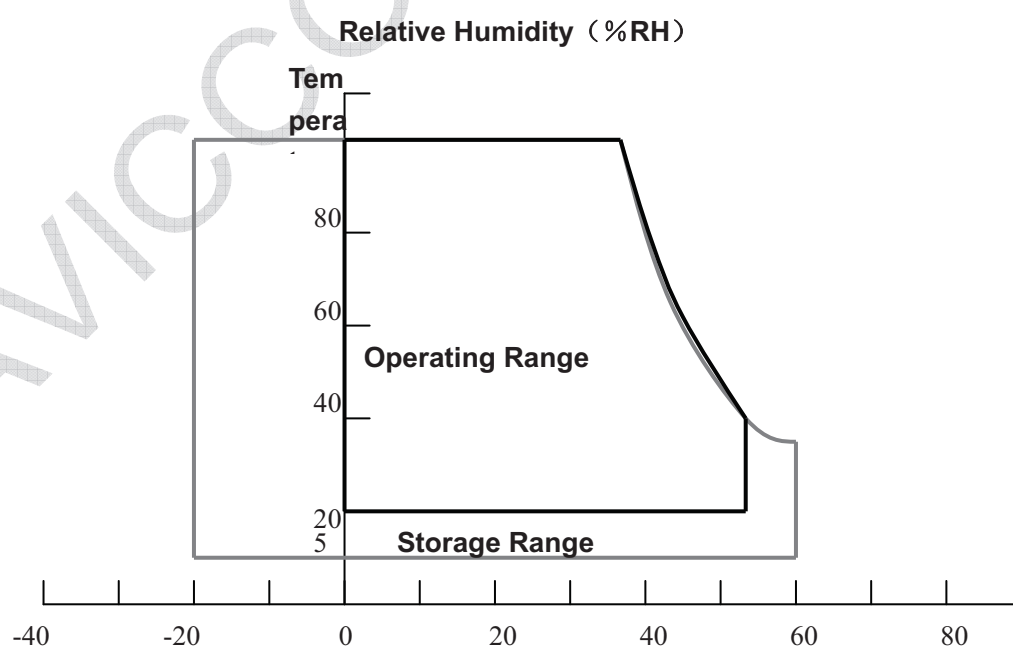

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



4. BLOCK DIAGRAM

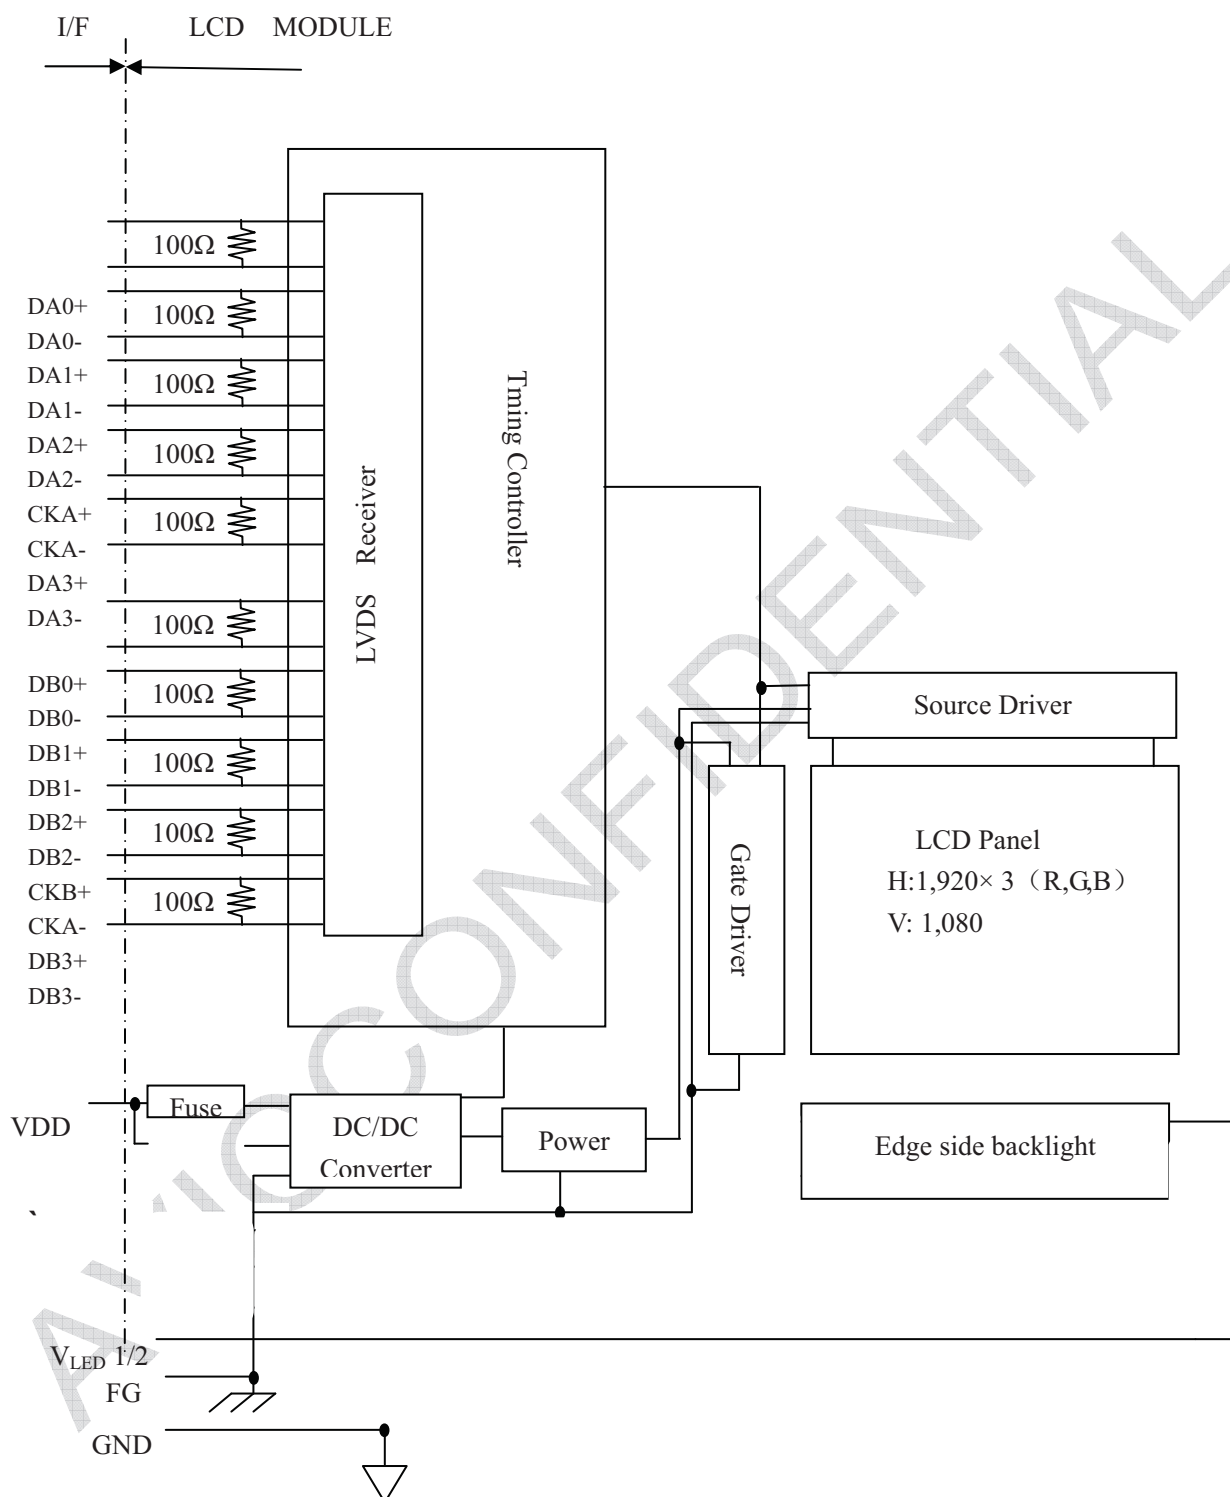

Note: System ground (GND), FG (Frame ground) in the product should be connected together in customer equipment.

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



5. MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	544.8± 0.5 (W) × 320.5 ± 0.5 (H) × 11.4 (D)	mm
Display area	521.28(H) × 293.22(V) mm (typ.), [60cm (23.6 inches)]	mm
Weight	TBD	g

6. ELECTRICAL CHARACTERISTICS

6.1 DRIVING FOR LCD


Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Power supply voltage		VDD	4.5	5.0	5.5	V	25°C
Power supply current		IDD	-	900 Note1	1080 Note 2	mA	at VDD = 5.0V
Permissible ripple voltage		VRP	-	-	300	mV	25°C,Vp-p
Differential input voltage		Vid	100		600	mV	
Differential input threshold voltage for LVDS receiver	Low	VTL	-100	-	-	mV	at VCM = 1.2V Note3
	High	VTH	-	-	100	mV	
Input voltage width for LVDS receiver		Vi	0	-	3.3	V	-
Terminating resistor		RT	-	100	-	Ω	-
Rush current		I _{rush}	-	-	2.5	A	Note4

Note 1: Checkered flag pattern (EIAJ ED-2522)

Note 2: 2H1V dot inverse pattern

Note 3: Common mode voltage for LVDS receiver

Note4: Measurement Conditions:

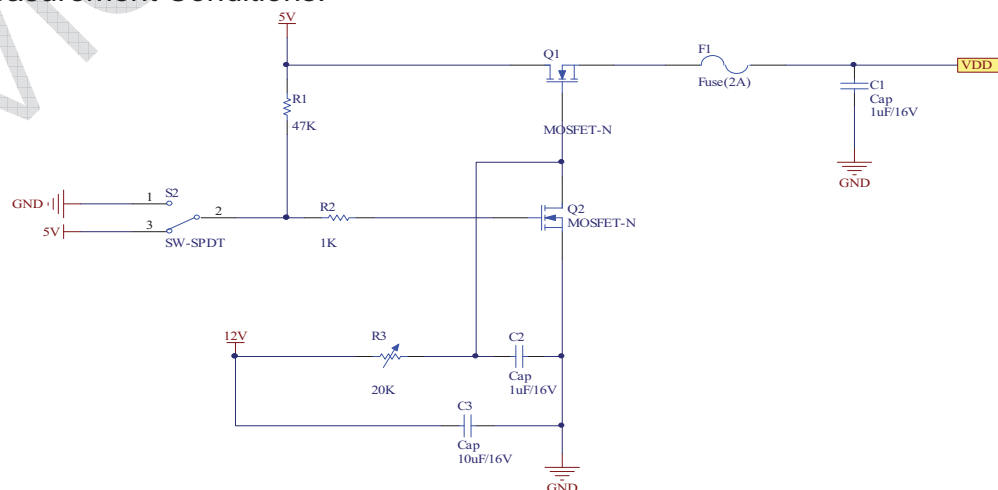

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.

**6.2 DRIVING FOR BACKLIGHT**

(Ta=25°C) Note1

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Light bar operation voltage (for reference)	V_{LED}	25	-	33	Vrms	Operating with fixed driving current
Light bar operation current (pin)	I_{LED}	-	120	150	mArms	Note1
Light bar operating lifetime	Hr	-	30000	-	Hour	$I_{LED}=120mA$, Note3

Note1: The backlight of this product is made up of 1 light bar, LED to be 4014, 72pieces, 9 serials and 4*2 parallels.

Note2: The light bar can work normally if the PWM dimming ratio range is from 0% to 100% and the operation current is 120mA.

Note3: The operating lifetime is mean time to half-luminance. In case the product works under room temperature environment.



7. CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS

7.1 LVDS CONNECTOR

CN1: FI-XB30SSRLA-HF16 (Produced by JAE) or equivalent.

Pin	Name	Description
1	RXO0-	Negative LVDS differential data input. Channel O0 (odd)
2	RXO0+	Positive LVDS differential data input. Channel O0 (odd)
3	RXO1-	Negative LVDS differential data input. Channel O1 (odd)
4	RXO1+	Positive LVDS differential data input. Channel O1 (odd)
5	RXO2-	Negative LVDS differential data input. Channel O2 (odd)
6	RXO2+	Positive LVDS differential data input. Channel O2 (odd)
7	GND	Ground
8	RXOC-	Negative LVDS differential clock input. (odd)
9	RXOC+	Positive LVDS differential clock input. (odd)
10	RXO3-	Negative LVDS differential data input. Channel O3(odd)
11	RXO3+	Positive LVDS differential data input. Channel O3 (odd)
12	RXE0-	Negative LVDS differential data input. Channel E0 (even)
13	RXE0+	Positive LVDS differential data input. Channel E0 (even)
14	GND	Ground
15	RXE1-	Negative LVDS differential data input. Channel E1 (even)
16	RXE1+	Positive LVDS differential data input. Channel E1 (even)
17	GND	Ground
18	RXE2-	Negative LVDS differential data input. Channel E2 (even)
19	RXE2+	Positive LVDS differential data input. Channel E2 (even)
20	RXEC-	Negative LVDS differential clock input. (even)
21	RXEC+	Positive LVDS differential clock input. (even)
22	RXE3-	Negative LVDS differential data input. Channel E3 (even)
23	RXE3+	Positive LVDS differential data input. Channel E3 (even)
24	GND	Ground
25	GND	Ground
26	NC	Not connection.
27	GND	Ground
28	VIN	+5.0V power supply
29	VIN	+5.0V power supply
30	VIN	+5.0V power supply

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.




7.2 BACKLIGHT

CN2:

Pin	Description
1	Cathode of LED string
2	Cathode of LED string
3	VLED
4	VLED
5	Cathode of LED string
6	Cathode of LED string

Note1: The ports of VDD and GND should be all used. As for the input of LVDS, please use the twisted pair wire of the transmission impedance 100Ω.

7.3 POSITION OF PLUGS AND A SOCKET

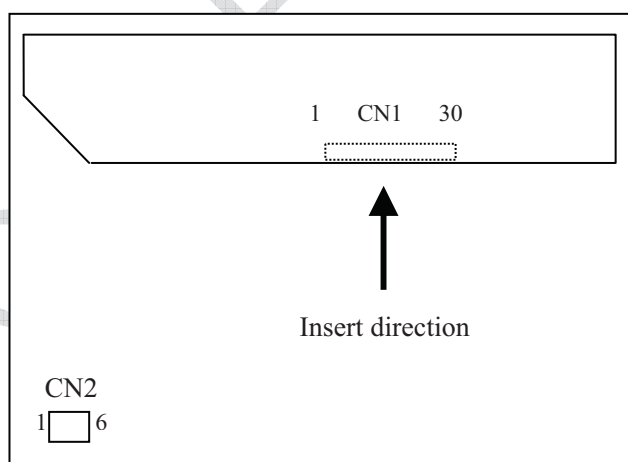

7.4 CONNECTION BETWEEN RECEIVER AND TRANSMITTER FOR LVDS

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



Input DATA		Transmitter		CN1	
		pin	DS90CF383,C385 or equivalent	pin	Symbol
Odd pixel data and control signals	RA0	→ 51	TXIN0	→ 1	DA0-
	RA1	→ 52	TXIN1	→ 2	DA0+
	RA2	→ 54	TXIN2		
	RA3	→ 55	TXIN3		
	RA4	→ 56	TXIN4	→ 3	DA1-
	RA5	→ 3	TXIN6	→ 4	DA1+
	GA0	→ 4	TXIN7		
	GA1	→ 6	TXIN8	→ 5	DA2-
	GA2	→ 7	TXIN9	→ 6	DA2+
	GA3	→ 11	TXIN12	→ 7	GND
	GA4	→ 12	TXIN13	→ 8	CKA-
	GA5	→ 14	TXIN14	→ 9	CKA+
	BA0	→ 15	TXIN15		
	BA1	→ 19	TXIN18	→ 10	DA3-
	BA2	→ 20	TXIN19	→ 11	DA3+
	BA3	→ 22	TXIN20		
	BA4	→ 23	TXIN21		
	BA5	→ 24	TXIN22		
	RSVD	→ 27	TXIN24		
	RSVD	→ 28	TXIN25		
	DE	→ 30	TXIN26		
	RA6	→ 50	TXIN27		
	RA7	→ 2	TXIN5		
	GA6	→ 8	TXIN10		
	GA7	→ 10	TXIN11		
	BA6	→ 16	TXIN16		
	BA7	→ 18	TXIN17		
	RSVD	→ 25	TXIN23		
	CLK	→ 31	CLKIN		
Even pixel data	RB0	→ 51	TXIN0		
	RB1	→ 52	TXIN1	→ 12	DB0-
	RB2	→ 54	TXIN2	→ 13	DB0+
	RB3	→ 55	TXIN3	→ 14	GND
	RB4	→ 56	TXIN4	→ 15	DB1-
	RB5	→ 3	TXIN6	→ 16	DB1+
	GB0	→ 4	TXIN7	→ 17	GND
	GB1	→ 6	TXIN8	→ 18	DB2-
	GB2	→ 7	TXIN9	→ 19	DB2+
	GB3	→ 11	TXIN12		
	GB4	→ 12	TXIN13	→ 20	CKB-
	GB5	→ 14	TXIN14	→ 21	CKB+
	BB0	→ 15	TXIN15		
	BB1	→ 19	TXIN18	→ 22	DB3-
	BB2	→ 20	TXIN19	→ 23	DB3+
	BB3	→ 22	TXIN20	→ 24	GND
	BB4	→ 23	TXIN21	→ 25	GND
	BB5	→ 24	TXIN22	→ 26	NC
	RSVD	→ 27	TXIN24	→ 27	GND
	RSVD	→ 28	TXIN25	→ 28	VDD
	RSVD	→ 30	TXIN26	→ 29	VDD
	RB6	→ 50	TXIN27	→ 30	VDD
	RB7	→ 2	TXIN5		
	GB6	→ 8	TXIN10		
	GB7	→ 10	TXIN11		
	BB6	→ 16	TXIN16		
	BB7	→ 18	TXIN17		
	RSVD	→ 25	TXIN23		
	CLK	→ 31	CLKIN		

Note1: The lowest bit (RA0, GA0, BA0, RB0, GB0, BB0), the most upper bit (RA7, GA7, BA7, RB7, GB7, BB7)

Note2: Connecting cable between LCD panel's connector and transmitter should use 100Ω twisted line.

Note3: If only Hsync and Vsync, the product don't work. Make sure DE signal has been input.

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



8. DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display in equivalent to 16,777,216 colors in 256 scales. Also the relation between display colors and input data signals is as the following table.

Display colors		Data signal （0:Low level, 1:High Level）																							
		R7	R6	R5	R4	R3	R2	R1	G7	G6	G5	G4	G3	G2	G1	B7	B6	B5	B4	B3	B2	B1			
		R0								G0							B0								
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magent a	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark ↑ ↓ Bright	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
		1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Dark ↑ ↓ Bright		0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
		0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
0		0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
Green		0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
0		0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Blue grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark ↑ ↓ Bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.




9. INTERFACE TIMING

9.1 TIMING CHARACTERISTICS

Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Clock	Frequency	1/tc	69.30	73.26	77.35	MHz	LVDS transmitter input
		tc	14.43	13.65	12.93	ns	
	Rise time, Fall time	-	Refer to the timing characteristics of LVDS transmitter			ns	Note 1
	Duty	-				-	
Horizontal signals	Cycle	th	14.8	18.0	26.5	μs	55.5kHz(typ.)
			1050	1100	1150	CLK	
	Display period	thd	960				-
Vertical signals	Cycle	tv	13.3	16.67	20	ms	60.0Hz(typ.)
			1100	1110	1121	H	
	Display period	tvd	1080				-
DE/Data	Setup time	-	Refer to the timing characteristics of LVDS transmitter			ns	Note 1
	Hold time	-				ns	
	Rise time, Fall time	-				ns	

Note1: See the data sheet of LVDS transmitter.


9.2 Input signal timing mapping

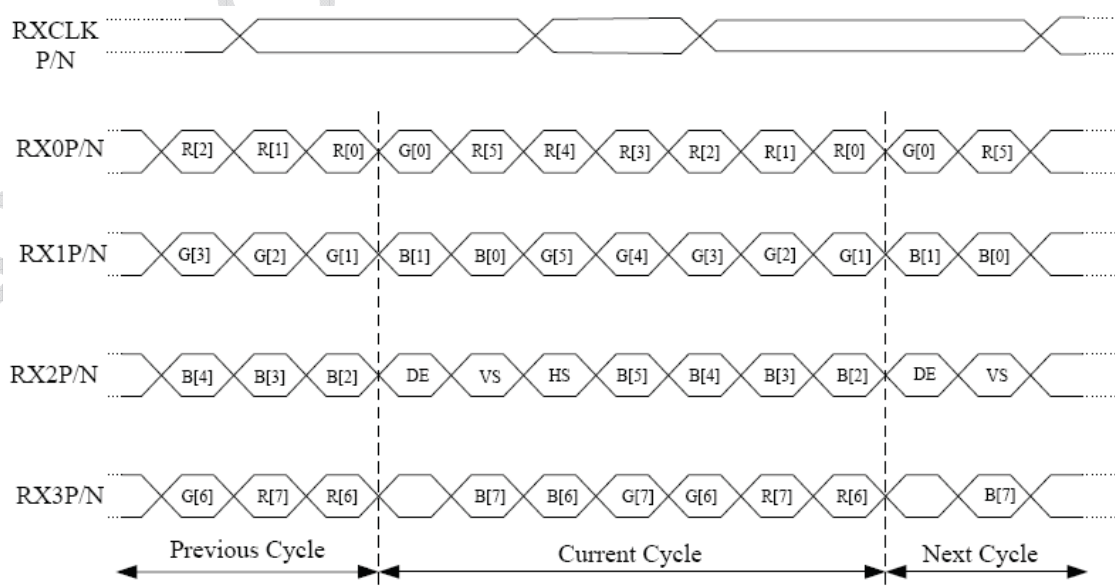

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



9.3 Power On/Off Sequence

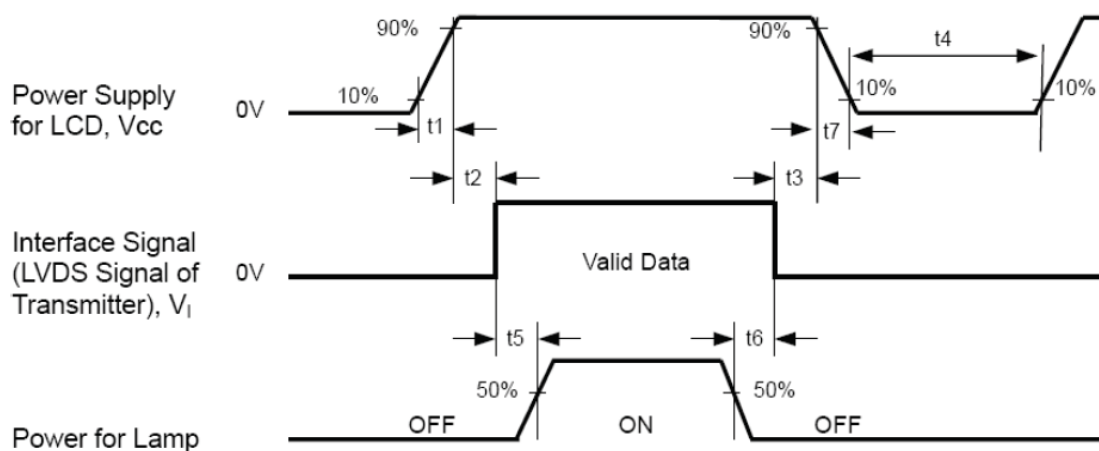

Parameter	Symbol	Unit	min	typ	max
VDD Rise Time	T1	ms	0.47	TBD	10
VDD Good to Signal Valid	T2	ms	0.5	TBD	50
Signal Disable to Power Down	T3	ms	0	TBD	50
Power Off	T4	ms	1000	TBD	TBD
Signal Valid to Backlight On	T5	ms	200	TBD	TBD
Backlight Off to Signal Disable	T6	ms	200	TBD	TBD
VDD Fall Time	T7	ms	0	TBD	100

Note1: When VDD is on, but the value is lower than 4.5V, a protection circuit may work, then the module may not display.

Note2: The signal line is not connected with the module, at the end of cable the terminal resistor of 100Ω should be added.

Note3: Display signals (D0+/-, D1+/-, D2+/-, D3+/- and CK+/-) must be "0" voltage, exclude the VALID period (See above sequence diagram). If these signals are higher than 0.3 V, the internal circuit is damaged.

If some of display signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If customer stops the display signals, they should cut VDD.

Note4: When VDD is on, it should be set above 4.0V.

Note5: The backlight power supply voltage should be inputted within the valid period of display and function signals, in order to avoid unstable data display.



9.4 POWER SUPPLY VOLTAGE RIPPLE

When the power supply is designed, the next form can give the reference. If the voltage ripple is over the value in next form, the noise should be seen in display area.

Ripple (Measured at input terminal of power supply)

	VDD (5V to drive the panel)
Ripple voltage	≤300mVP-P (Including spike noise)

9.5 Fuse

Parameter	Fuse		Rating	Fusing current	Remarks
	Type	Supplier			
VDD	F0603FA2000V032T	AEM	2A 32V	-	

Note1: There are different power supply systems from the power input terminal. The power supply capacity should be less than the fusing current. If the power supply capacity is above the fusing current, the fuse may blow in a short time, and then nasty smell, smoking and so on may occur.



10. OPTICS

10.1 Optical characteristics

Note1 ,Note2

Parameter Note1		Condition	Symbol	min.	typ.	max.	Unit	Remarks
Luminance		White at center θR=0°, θL=0°, θU=0°, θD=0°	L	(200)	250	-	cd/ m ²	-
Contrast ratio		White/Black at center θR=0°, θL=0°, θU=0°, θD=0°	CR	(700)	1000	-	-	Note3
Luminance uniformity		White θR=0°, θL=0°, θU=0°, θD=0	LU	-	1.25	(1.33)	-	Note4
Chromaticity	White	X coordinate	Wx	0.283	0.313	0.343	-	Note5
		Y coordinate	Wy	0.299	0.329	0.359	-	
	Red	X coordinate	Rx	-	TBD	-	-	
		Y coordinate	Ry	-	TBD	-	-	
	Green	X coordinate	Gx	-	TBD	-	-	
		Y coordinate	Gy	-	TBD	-	-	
	Blue	X coordinate	Bx	-	TBD	-	-	
		Y coordinate	By	-	TBD	-	-	
Color gamut		θR=0°, θL=0°, θU=0°, θD=0 At center,against NTSC	C	-	68	-	%	
Response time		White to black	Ton	-	1.3	(2.6)	ms	Note6
		Black to white	Toff	-	3.7	(7.4)	ms	Note7
		Ton+ Toff	-	-	5	(10)	ms	
Viewing angle	Right	θU=0°, θD=0°, CR≥10	θR	(75)	85	-	°	Note8
	Left	θU=0°, θD=0°, CR≥10	θL	(75)	85	-	°	
	Up	θR=0°, θL=0°, CR≥10	θU	(70)	80	-	°	
	Down	θR=0°, θL=0°, CR≥10	θD	(70)	80	-	°	


Note1: The values in upper table are only initial characteristics.

Note2: Measurement conditions are as follows.

Ta= 25°C, VDD= 5.0V, IBL= 6.5mA/m²/lamp, Display mode: WXGA+,

Horizontal cycle=55.56KHz, Vertical cycle=60.0Hz

Optical characteristics are measured at luminance saturation after 30minutes from working the product in the dark room. Also measurement method for luminance is as follows.

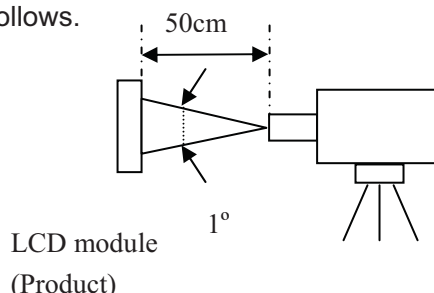

Luminance Meter (TOPCON BM-5A)
Spectroradiometer(TOPCON SR-3)

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



Note 3: See “10.2 Definition of contrast ratio”.

Note 4: See “10.3 Definition of luminance uniformity”.

Note 5: CIE 1931 Chromaticity Diagram Standard.

Note 6: Product surface temperature: TopF = 33.0 °C

Note 7: See “10.4 Definition of response time”.

Note 8: See “10.5 Definition of viewing angle”.

10.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

10.3 Definition of luminance uniformity

The luminance uniformity is calculated by using the following formula.

$$\text{Luminance uniformity (LU)} = \frac{\text{Maximum luminance from ① to ⑨}}{\text{Minimum luminance from ① to ⑨}}$$


The luminance is measured at near the 9 points shown below.

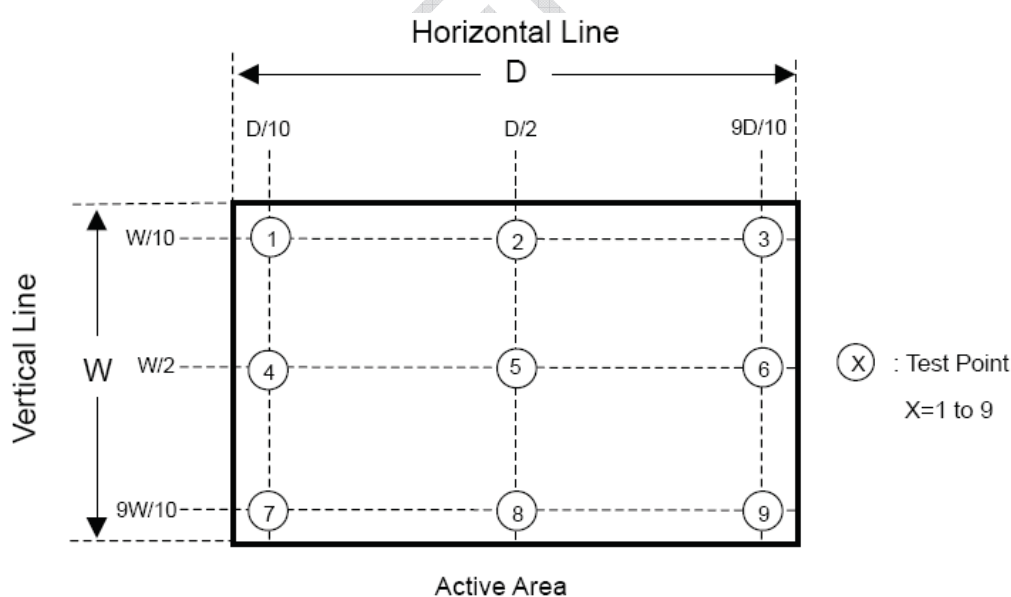




10.4 Definition of response times

Response time is measured, the luminance changes from “white” to “black”, or “black” to “white” on the same screen point, by photo-detector. Ton is the time it takes the luminance change from 90% down to 10%. Also Toff is the time it takes the luminance change from 10% up to 90%. (See the following diagram.)

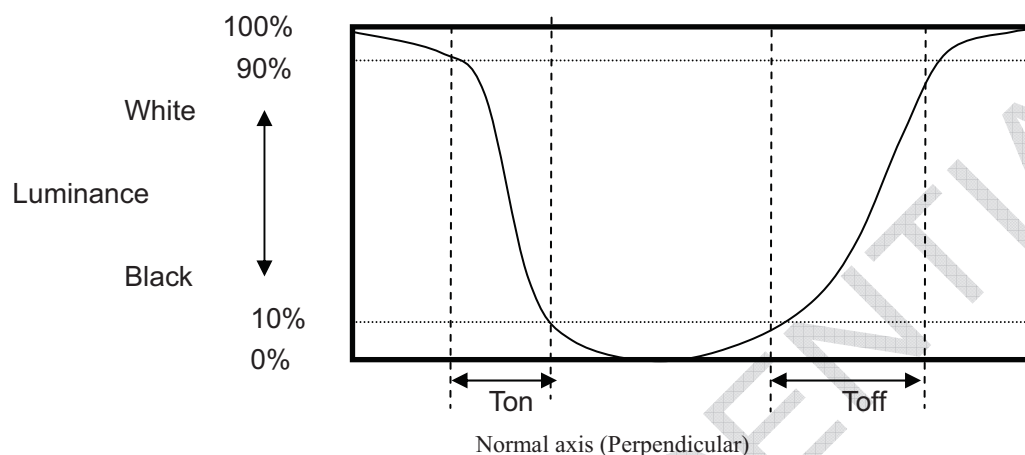

10.5 Definition of viewing angles

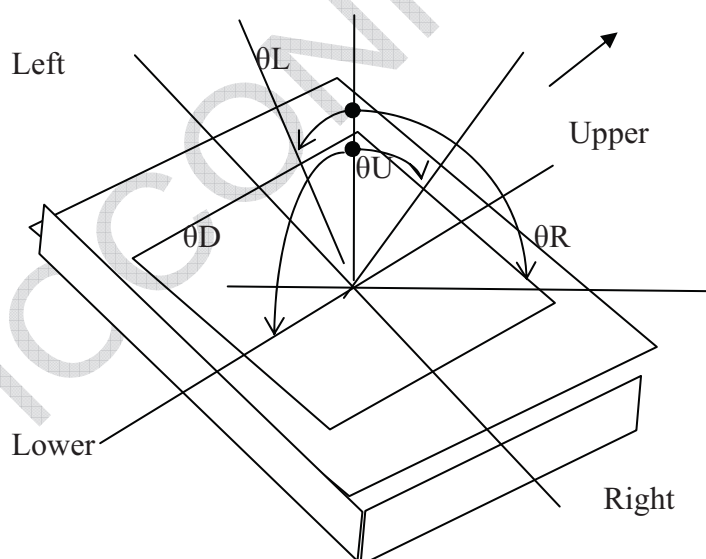

12 o'clock



11. MARKINGS

The various markings are attached to this product. See "11.2 INDECATION LOCATIONS" for attachment positions.

11.1 PRODUCT LABEL



Note1: The meaning of OEM number, Example: S236V01A12SA1SA109A0374

S236V01A

Module Number

12

Source & Gate
Driver IC Code

SA1SA1

Location Line#

09A

Date code

0374

Serial Number

Date code:

1st Character Year Codes

Month	2010	2011	2012	2013	2014	2015	2016	2017	2018	So on
Code	0	1	2	3	4	5	6	7	8	

2nd Character Month Codes

Month	January	February	March	April	May	June	July	August	September	October	November	December
Code	1	2	3	4	5	6	7	8	9	A	B	C

3rd Character Day Codes

Day	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	11st	12nd
Code	1	2	3	4	5	6	7	8	9	A	B	C

13rd	14th	15th	16th	17th	18th	19th	20th	21st	22nd	23rd	24th
D	E	F	G	H	J	K	L	M	N	P	Q

25th	26th	27th	28th	29th	30th	31st
R	S	T	U	V	W	X

Note2: Do not attach anything such as label and so on, on the product label! In case repair the product, AVIC needs the contents of product label such as the lot number, inspection date and so on, to identify the warranty period with individual product. If AVIC cannot decipher the contents of product label, such repair shall be entitled to charge. Also AVIC may give a new lot number to reconditioned products.


The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



SHANGHAI AVIC OPTOELECTRONICS

Q/S1010-2011

11.2 INDICATION LOCATIONS

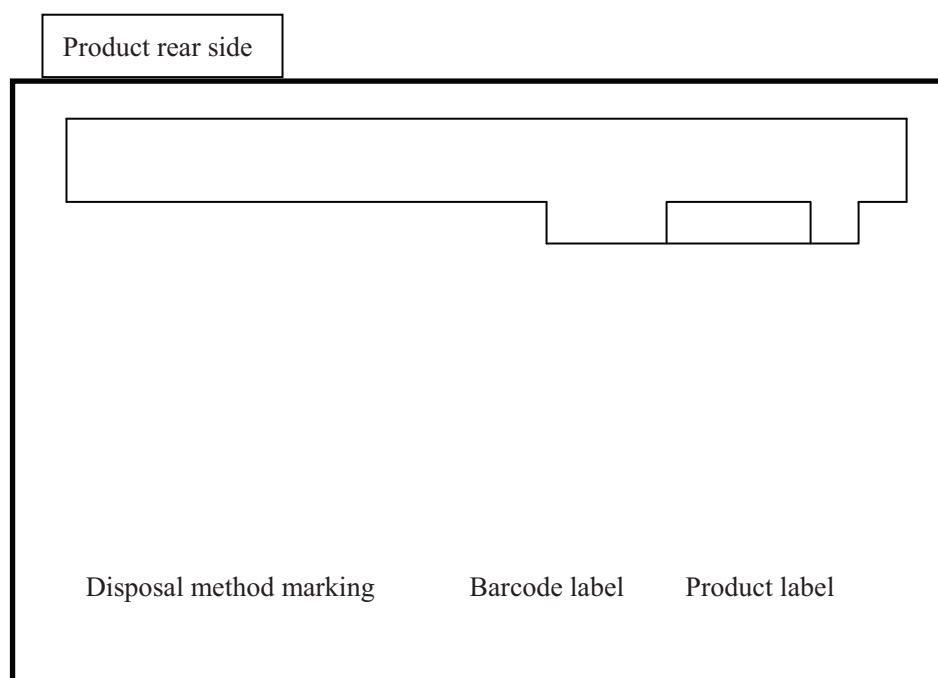

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



12. PACKING, TRANSPORTATION AND DELIVERY

AVIC will pack products to deliver to customer in accordance with AVIC packing specifications, and will deliver products to customer in such a state that products will not suffer from a damage during transportation .The delivery conditions are as follows.

12.1 PACKING

(1) Packing box

6 products are packed up with the maximum in a packing box(See “**12.5 OUTLINE FIGURE FOR PACKING**”).

Products are put into a plastic bag for prevention of moisture with cushion, and then the bag is sealed up with heat sealing.

The type name and quality are shown on outside of the packing box, either labeling or printing.

(2) Pallet Packing (See“**12.5 OUTLINE FIGURE FOR PACKING**”)

- ① Packing boxes are tired on a cardboard pallet.(8 boxes×4 tiers maximum)
- ② Cardboard sleeve and top cap are attached to the packing boxes, then they are fixed by a band.

12.2 INSPECTION RECORD SHEET

Inspection record sheets are included in the packing box with delivery products to customer. It is summarized to a number of products for pass/fail assessment.

12.3 TRANSPORTATION

The product is transported by vehicle, aircraft or shipment in the state of pallet packing.

12.4 SIZE AND WEIGHT FOR PACKING BOX


Parameter	Packing box	Unit
Size	604 (L) × 274 (W) × 417 (H) (typ.)	mm
Weight	TBD	kg
Total weight	TBD	kg



SHANGHAI AVIC OPTOELECTRONICS

12.5 OUTLINE FIGURE FOR PACKING

Q/S1010-2011

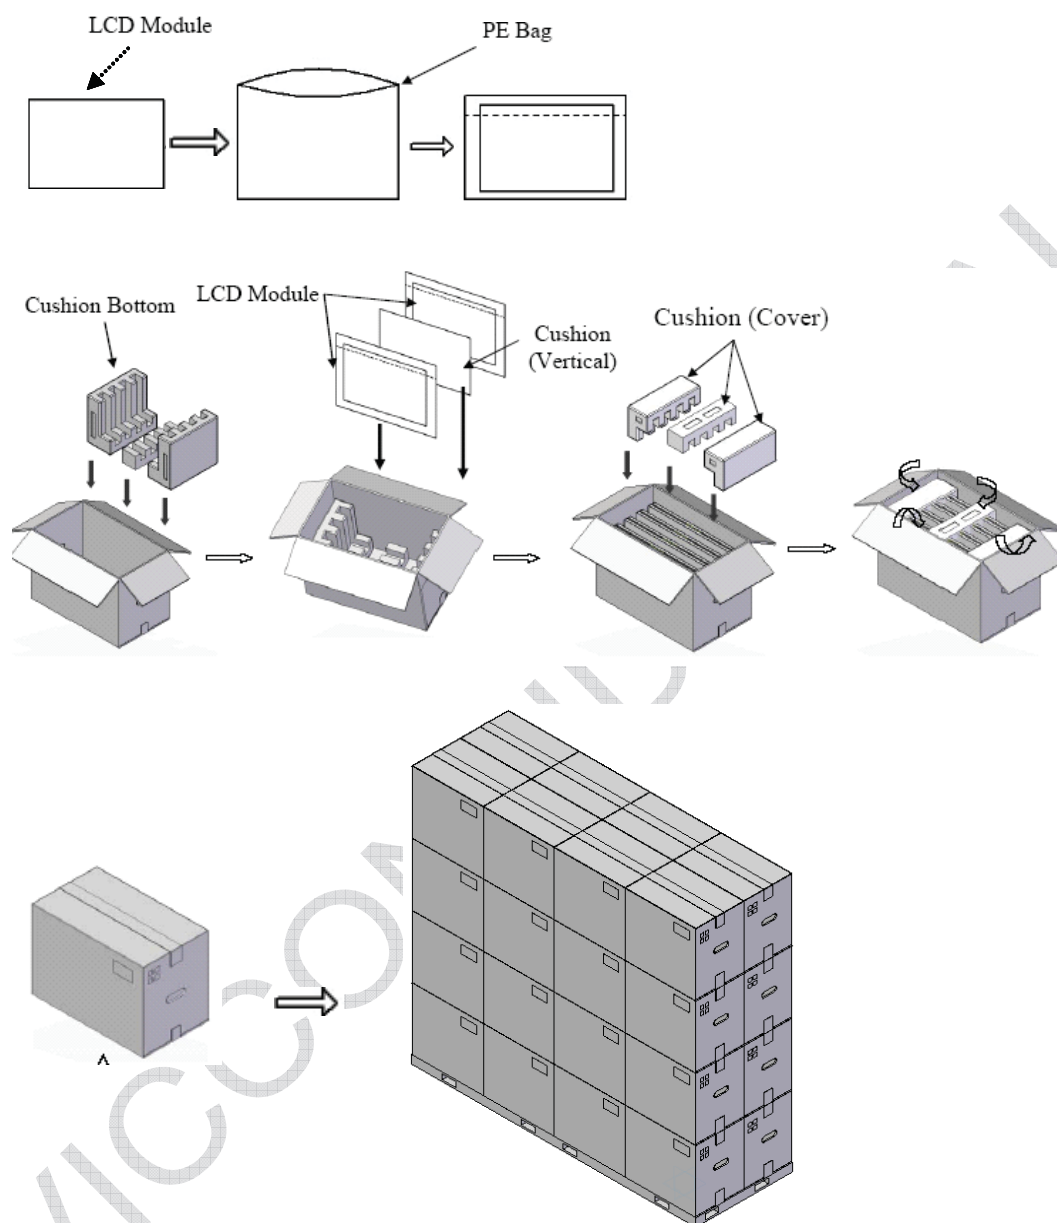



13. PRECAUTIONS

13.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning .**Be sure to read “9.2 CAUTIONS” and “9.3 ATTENTIONS”, after understanding these contents!**



This sign have the meaning that customer will be injured by himself or the product will sustain a damage, if customer has wrong operations.



This sign has the meaning that customer will get an electrical shock, if customer has wrong operations.



This sign has the meaning that customer will be injured by himself, if customer has wrong operations.

13.2 CAUTIONS



Do not touch lamp cables while turn on .Customers will be in danger of an electric shock



- * Do not touch the working backlight and IC. Customers will be in danger of burn injury.
- * Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass.(shock :To be not greater 294m/s^2 and to be not greater 11ms, Pressure: To be not greater 19.6N)

13.3 ATTENTIONS



13.3.1 Handling of the product

- ① Take hold of both ends without touch the circuit board when customer pulls out products (LCD modules) from inner packing box. If customer touches it, products may be broken down or out of adjustment, because of stress to mounting parts.
- ② Do not hook cables nor pull connection cables such as flexible cable and so on , for fear of damage.
- ③ If customer puts down the product temporarily, the product puts on flat subsoil as a display side turns down.
- ④ Take the measures of electrostatic discharge such as earth band, ionic shower and so on, when customer deal with the product, because products may be damaged by electrostatic.

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



- ⑤ The torque for mounting screws must never exceed 0.34N-m. Higher torque values might result in distortion of the bezel.
- ⑥ The product must be installed using mounting holes without undue stress such as bends or twist (See outline drawings). And do not add undue stress to any portion (such as bezel flat area) except mounting hole portion.
- ⑦ Bends or twist described above and undue stress to any portion except mounting hole portion may cause display un-uniformity.
- ⑧ Do not press or rub on the sensitive display surface. If customer clean on the panel surface, AVIC recommends using the cloth with ethanolic liquid such as screen cleaner for LCD.
- ⑨ Do not push-pull the interface connectors while the product is working, because wrong power sequence may break down the product.
- ⑩ Do not bend or unbend the lamp cable at the near part of the lamp holding rubber, to avoid the damage for high voltage side of the lamp. This damage may cause a lamp breaking and abnormal operation of high voltage circuit.

13.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in antistatic pouch in room temperature, because of avoidance for dusts and sunlight, if customer stores the product.
- ② In order to prevent dew condensation occurring by temperature difference, the product packing box must be opened after leave under the environment of an unpacking room temperature enough. Because a situation of dew condensation occurring is changed by the environment temperature and humidity, evaluate the leaving time sufficiently. (Recommendation leaving time: 6 hour or more with packing state)
- ③ Do not operate in a high magnetic field. Circuit boards may be broken down by it.
- ④ This product is not designed as radiation hardened.
- ⑤ Use an original protection sheet on the product surface (polarizer). Adhesive type protection sheet should be avoided, because it may change color or properties of the polarizer.

13.3.3 Characteristics

The following items are neither defects nor failures.

- ① ambient temperature.
- ② The LCD may be seemed luminance non-uniformity, flicker, vertical seam or small spot by display patterns.
- ③ Optical characteristics (e.g. luminance, display uniformity, etc.) gradually is going to change depending on operating time, and especially low temperature, because the LCD has cold cathode fluorescent lamps.
- ④ Do not display the fixed pattern for a long time because it may cause image sticking. Use a screen saver, if the fixed pattern is displayed on the screen.
- ⑤ The display color may be changed by viewing angle because of the use of condenser sheet in the backlight.
- ⑥ Optical characteristics may be changed by input signal timings.

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.



- ⑦ The interference noise of input signal frequency for this product and luminance control frequency of customer's backlight inverter may appear on a display. Set up luminance control frequency of backlight inverter so that the interference noise does not appear.

13.4 Other


- ① All GND and VCC terminals should be used without a non-connected line.
- ② Do not disassemble a product or adjust volume without permission of AVIC.
- ③ Pay attention not to insert waste materials inside of products, if customer uses screw nails.
- ④ Pack the product with original shipping package, because of avoidance of some damages during transportation, when customer returns it to AVIC for repair and so on .
- ⑤ Not only the module but also the equipment should be packed and transported as the module. becomes vertical .Otherwise, there is the fear that a display dignity decreases by an impact or vibrations.




SHANGHAI AVIC OPTOELECTRONICS

Q/S1010-2011

14.OUTDRAWING

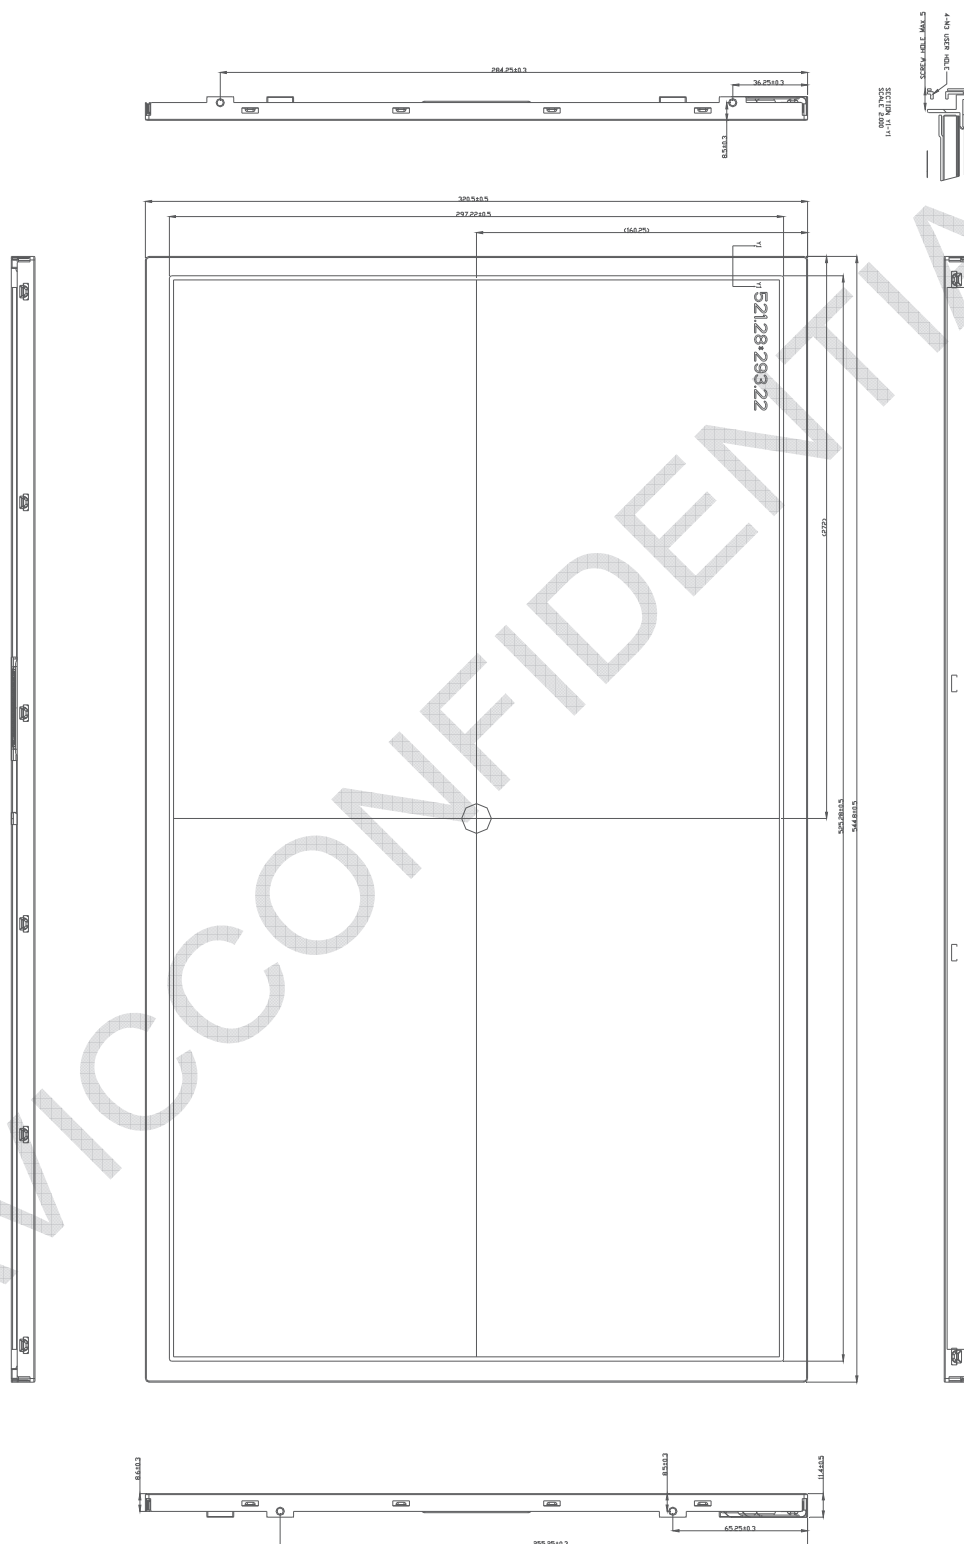

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.

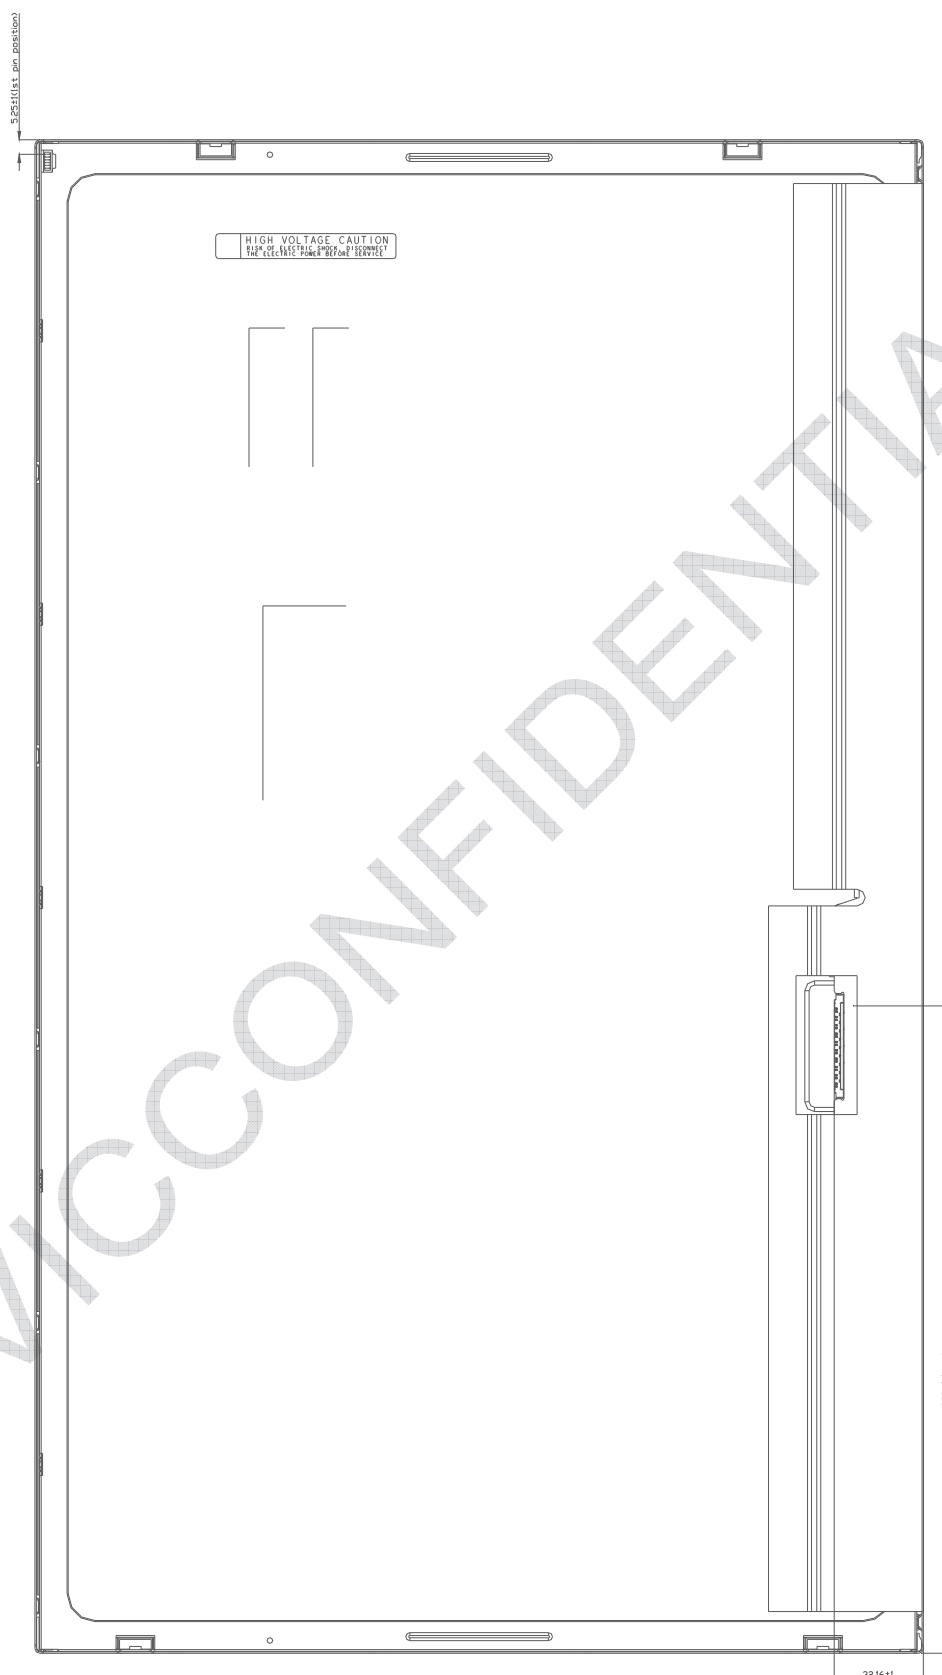

The information contained herein is the exclusive property of SHANGHAI AVIC OPTOELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI AVIC OPTOELECTRONICS Corporation.